

8 7 6 5 4 3 2 1

D


D

C

C

B

B

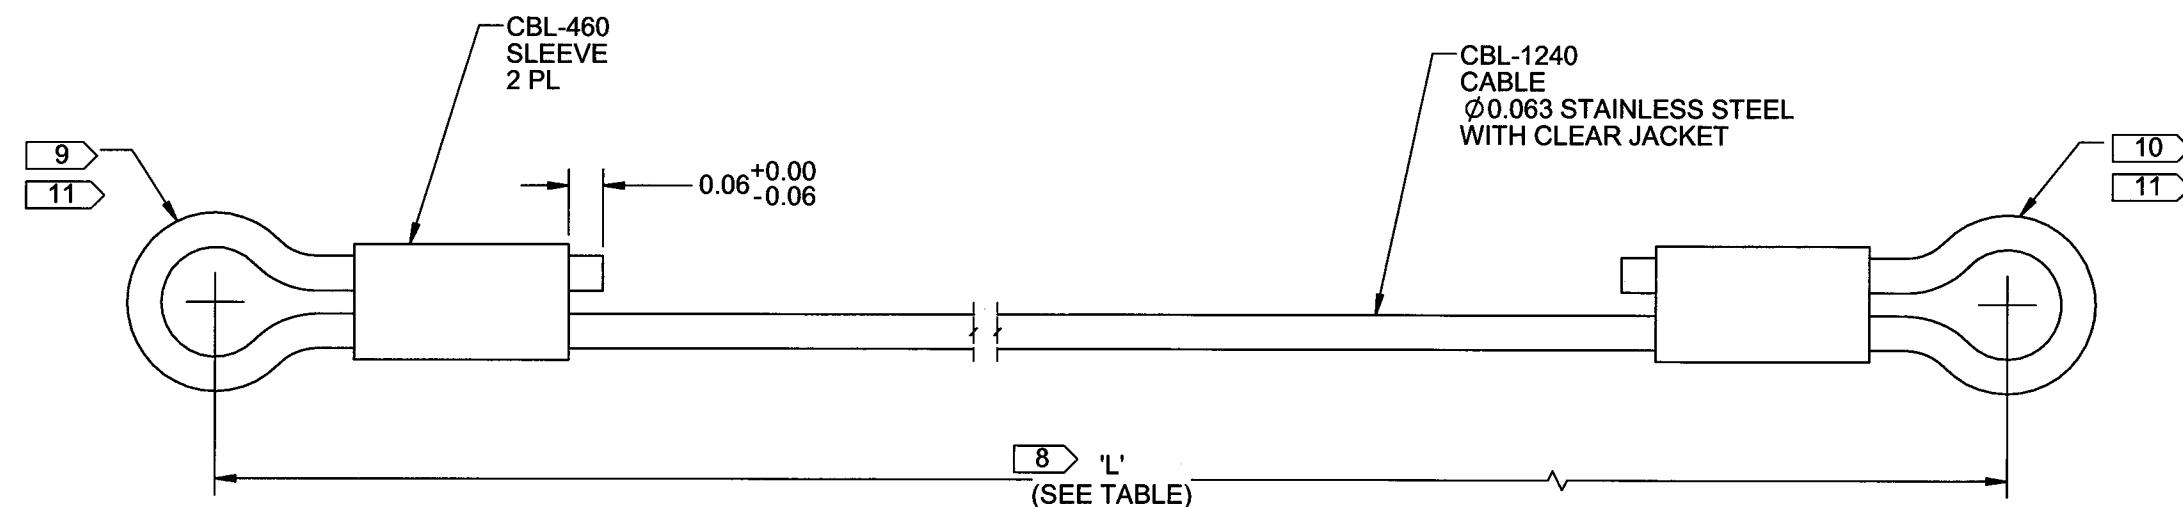

**D5911-X LANYARD**

PART NUMBER	8 > 'L'
D5911-1	6.00
D5911-3	7.00

**NOTES:**

- 1) MATERIAL: N/A
- 2) FINISH: N/A
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: PER DART QSI 044
- 7) WEIGHT: 0.01 lbs
- 8) CUT CABLE 2.50 INCHES LONGER THAN 'L' LENGTH.
- 9) FOLD END TIGHT AND CRIMP WITH CBL-460 SLEEVE USING CBL-705 CRIMPING TOOL.
- 10) CRIMP OTHER END AFTER INSTALLATION ON D5904-041 LOWER CUTTER ASSY.
- 11) REMOVE 2.12 - 2.25 INCHES OF JACKET FROM END OF CABLE PRIOR TO CRIMPING.

**RELEASED**

2020 NOV 16 *gj*

APPROVED

A	NEW ISSUE	ZF	20.10.19
REV.	DESCRIPTION	BY	DATE
DESIGN	ZF	<b>DART AEROSPACE LTD</b> HAWKESBURY, ONTARIO, CANADA	DRAWING NO. <b>D5911</b> REV. A SHEET 1 OF 1
DRAWN	ZF		
CHECKED	ML		
MFG. APPR.	JFS		
APPROVED	ML		
DE APPR.	CP <i>gj</i>		
SCALE	TITLE		NTS
DATE	20.10.19	COPYRIGHT © 2020 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

8 7 6 5 4 3 2 1

A

1